





Range 44 CE - Surface-mounting watertight junction boxes in compliance with EN 60670-1 (CEI 23-48) and IEC 60670-22 (CEI 23-94) and made in high-performance technopolymers. The range includes versions with protection degree IP44, IP55, IP56 with smooth walls or with quick entry cable glands and different type of covers: blind / transparent, deep/plain, press-on/screw (in plastic, also 1/4 turn, or in metal). Available in different self-extinguishing materials (up to GWT 960 °C). Suitable for ordinary junctions, for special uses, and for industrial uses.



|                                   |                                      |                                 |                                      |
|-----------------------------------|--------------------------------------|---------------------------------|--------------------------------------|
| Yalıtım sınıfı                    | II (IEC 61140 standartlarına göre)   | Renk                            | Gri RAL 7035                         |
| IP derecesi                       | IP56                                 | Malzeme                         | Teknopolimer GWPLAST 75              |
| Direnç dayanıklı                  | IK08                                 | İç boyut LxHxD (mm)             | 380x300x120                          |
| Mümkün olan Maks Ø delik panoları | 48 mm                                | Kapak vidaları (sayısı ve tipi) | 4 yalıtkan sızdırmaz menteşeli       |
| Kapak                             | Standart bağlantılar                 | Akkor Tel Deneyi:               | 650 °C                               |
| Malzeme tipi                      | EN 60754-2 uyarınca halojen Free dir | Çalıştırma sıcaklığı            | -25 +60 °C                           |
| Bilyeli termo sıcaklık            | 85 °C                                | Tork vida sıkıştırma            | 02211                                |
| Duvarlar                          | Pürüzsüz                             | Yalıtım onarım aksesuarları     | 1.8 Newton/metre<br>GW44621, GW44623 |

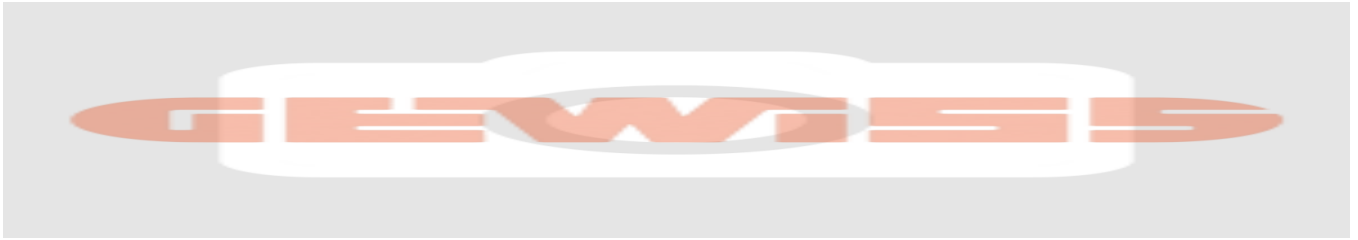
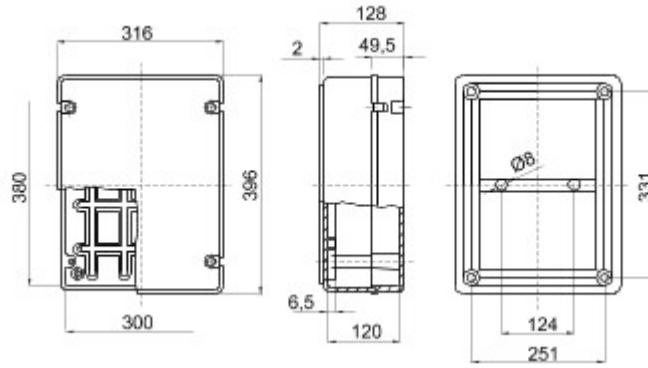
### DIMENSIONAL



### TECHNICAL SYMBOLOGY

|   |                   |                   |                      |   |   |  |
|---|-------------------|-------------------|----------------------|---|---|--|
| <br>II (IEC 61140 standartlarına göre) | <b>IP</b><br>IP56 | <b>IK</b><br>IK08 | <b>GWT</b><br>650 °C | <br>-25 +60 °C | <b>HF</b><br>HALOGEN FREE<br>EN 60754-2 uyarınca halojen Free dir | <br>85 °C |
|---|-------------------|-------------------|----------------------|---|---|--|

### STANDARDS/APPROVALS

