




70 RT HP is a new range of 16A to 160A switch disconnectors in isolating material and metal, supplied in a box. Available in control and emergency versions, the range is completed by board versions for front-panel or DIN rail assembly, in 16 to 63A options, all of which can be equipped with auxiliary contacts. These devices have been designed to deliver the ultimate in reliability, functionality and performance. They offer a technologically advanced solution that simplifies installation, reduces wiring times and ensures maximum safety and robustness, even in the most demanding conditions, thanks to the use of high-performance materials.

Versiyon	Box	Malzeme	Metal
Tip	Command	Nominal akım (A)	80
Kutup sayısı	4P	Devre kesici	Rotary isolator
IP derecesi	IP66	Direnç dayanıklı	IK10 (IK08 knob)
Ortam sıcaklığı	-25 +60 °C	Lid screws (no. and type)	4 metal screws
Delik girişi	4xM32	Kitlenebilir	YES (max. 3 locks in ON and OFF)
Aksesuar tipi	Max. 2 auxiliary contacts	Current in AC22 (415V)	80
Current in AC23 (415V)	80	Kablo kısmı	maks 25 mm <sup>2</sup>
Dış boyut LxHxD (mm)	215x252x91	Elektrokod	1742



### DIMENSIONAL

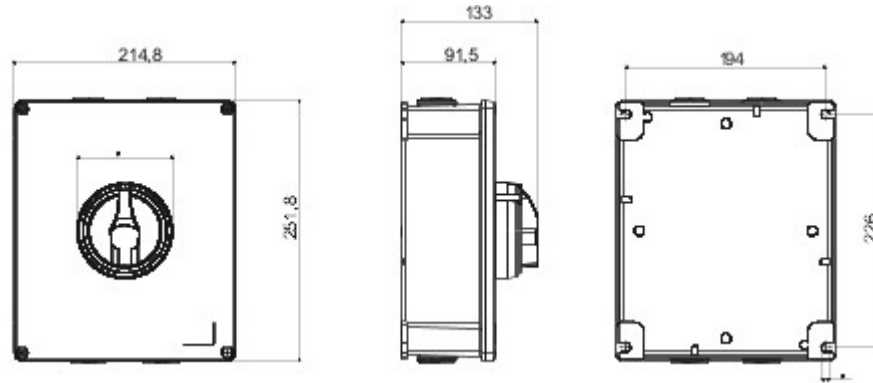

### TECHNICAL SYMBOLOGY

**IP**

IP66

**IK**

IK10 (IK08 knob)

### STANDARDS/APPROVALS

