




A complete, versatile system of modular containers, perfectly integrable in the SYSTEM domestic range and able to meet the high protection installation requirements of the residential, commercial and industrial sectors. The 27 COMBI range is available both in the IP40 version and in watertight versions with IP55, IP65 and IP66 degree of protection, recommended for all outdoor applications which are subjected to extreme atmospheric conditions.

No. m	4	Renk	Beyaz RAL 9010
İtiş yeri deliği adedi Ø23	1 altta	delik tipi	Aletle çıkarılabilir
Yalıtım sınıfı	II	Direnç dayanıklı	IK07
Bölme ön ayarı	1	Özellikler	Halojen free
Kapak vidaları	Corrosion-resistant steel	Tork vida sıkıştırma	0.8 Newton/metre
Dış boyut LxHxD (mm)	132x82x54	Akkor Tel Deneyi:	650 °C
Bilyeli termo sıcaklık	70 °C	Standart	EN 50085-2-1
Kurulum sıcaklığı	-5 +60 °C	Elektrokod	0212



DIMENSIONAL

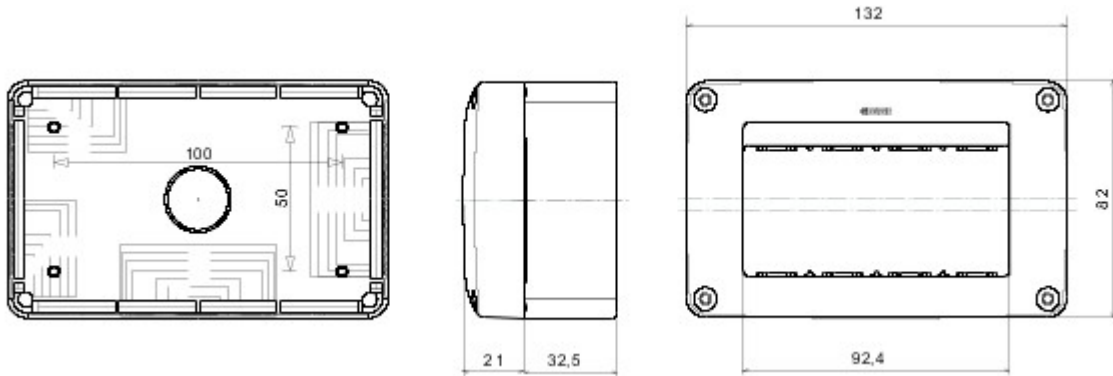


TECHNICAL SYMBOLOGY



IK
IK07



GWT
650 °C



STANDARDS/APPROVALS

