




A complete, versatile system of modular containers, perfectly integrable in the SYSTEM domestic range and able to meet the high protection installation requirements of the residential, commercial and industrial sectors. The 27 COMBI range is available both in the IP40 version and in watertight versions with IP55, IP65 and IP66 degree of protection, recommended for all outdoor applications which are subjected to extreme atmospheric conditions.

Tanım	Liht butonu 1P NA 10A	Voltaj	250 V ac
Renk	Gri RAL 7035	İtiş yeri deliği adedi Ø23	Yanlarda 3 / Altta 1
Kablo rakorlu delik sayısı Ø 23	1	delik tipi	Aletle çıkarılabilir
IP derecesi	IP40	Yalıtım sınıfı	II
Kapak vidaları	Corrosion-resistant steel	Tork vida sıkıştırma	0.8 Newton/metre
Dış boyut LxHxD (mm)	66x82x55	Akkor Tel Deneyi:	650 °C
Bilyeli termo sıcaklık	70 °C	Standart	EN 60669-1
Kurulum sıcaklığı	-25 +60 °C	Elektrokod	0130



### DIMENSIONAL

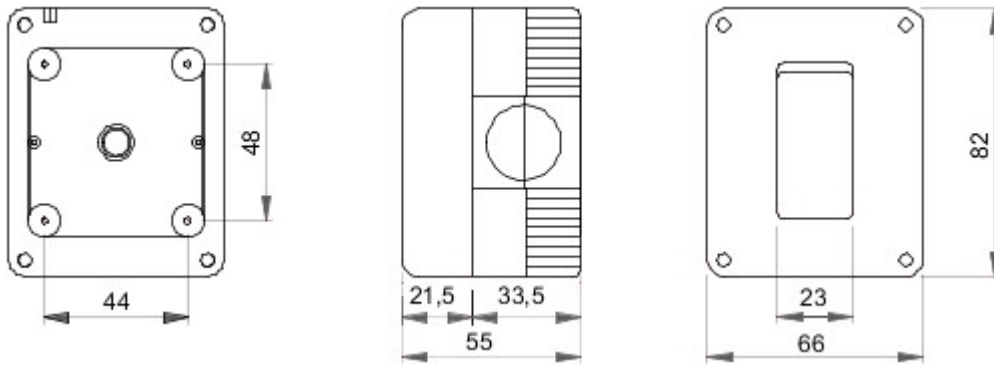

### TECHNICAL SYMBOLOGY



IP

IP40



II

GWT

650 °C



70 °C

### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 14/04/2021

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice