




A system of command and control wireless devices based on Zigbee technology that offers innovative solutions for the renovation of buildings, minimizing the structural interventions. Zigbee is a safe and reliable system because the data exchanged are encrypted and every node of the network always ensures reachability among all the devices (mesh network). The Zigbee devices enrich the range of home&building automation solutions by Gewiss and can be managed via App, with smartphone and tablet, through the Smart Gateway.

Category	Contacts interface	Communication protocol	Zigbee (IEEE 802.15.4)
Supply voltage	Battery powered	Power supply batteries	CR2032 replaceable
Output power	8 dBm	No. input channels	2
Input voltage	Potential-free	Max cable length	15 m
Standard	2014/53/EU, EN 60669-2-1, EN 60669-1, ETSI EN 300-328	IP degree	IP20
Working temperature	-5 ÷ +45 °C	Stocking temperature	-25 ÷ +70 °C
Relative humidity (non-condensative)	Max 93%	Dimensions LxHxD (mm)	42x40x20
Electrocod	051A		

DIMENSIONAL

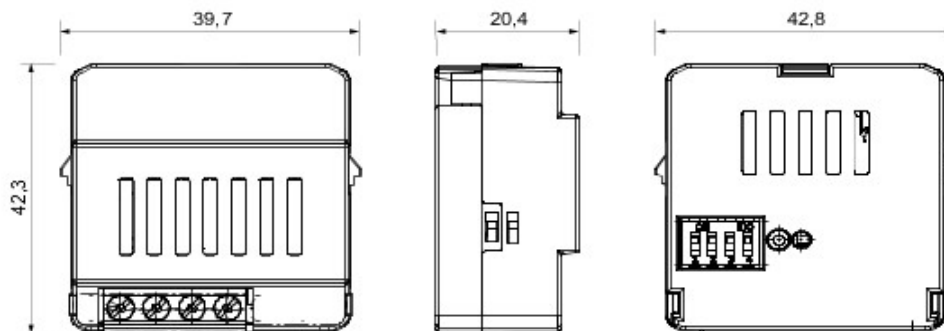

TECHNICAL SYMBOLOGY

IP

IP20

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 03/03/2021

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice