




Complete system for the connection and distribution of LAN networks in residential and tertiary sector environments.

The range includes fibre optic solutions, wall panels, floor cabinets and copper wiring products.

The Data Center series provides all the products necessary to create a multi-service fibre optic infrastructure for residential buildings, in full compliance with all the indications dictated by the new IEC Guide 306-2 and Law 164/14.

Catégorie	Pre-wired Apartment Optical Termination Box	Matière	Plastique
Couleur	Blanc	Caractéristiques	With 4 SC/APC adapters
Dimensions LxHxP (mm)	101x85x31	Installation	Wall mount/In multimedia boards
No. optical fibers	4	Cable length	15 m
Ø sheath	3 mm	Ø pulling sheath	< 4,5 mm
For connectors	SC/APC - Fiber Fast	Classification	G.657.A2 / B6_a2 Bend Insensitive
Ø core	9 µm	Ø cladding	125 µm
Strength member	Kevlar	Outer jacket	LSZH
Câble	Loose - OS2	CPR class	Eca
Tension	100 N	Crush	500 N/10cm
Minimum bend radius (Dynamic)	20x cable diameter	Minimum bend radius (Static)	10x cable diameter
Max attenuation (@1310 nm / @1550 nm)	0.35 dB/Km (@1310 nm) / 0.2 dB/Km (@1550 nm)	Température de fonctionn.	From -20°C to +60°C

DIMENSIONS

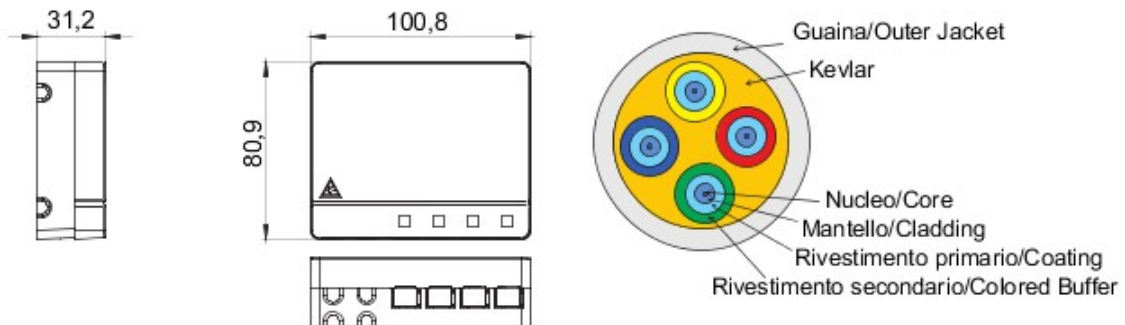

NORMES ET HOMOLOGATIONS



GEWISS S.A.S. 1, Rue du Rio Salado 91940
Les Ulis Cedex
Tel : +33 1 64 86 80 80

www.gewiss.com
www.gewiss@gewiss.fr
Dernière mise à jour 30/09/2020

Les caractéristiques, dimensions, dessins et images sont communiqués à titre purement informatif et peuvent faire l'objet de modification sans aucun préavis