Product Data Sheet

GW40067BS

40 CD serie

The IP40 protected decorative enclosures are available in sizes from 8 to 72M. They provide superior aesthetic integration and are equipped with screw wiring multipolar terminal blocks, 80 A IP 20. They are available with smoked transparent doors or with blank doors that can be equipped with safety lock, characterized by the "PUSH" opening and closing. The terminal blocks allow to create simple and neat wiring reducing the set-up time of the enclosure.

Isolatie-klasse	II (conform de norm IEC 61140)	Kleur	Wit RAL 9016
Buitenafm. LxHxD (mm)	280x350x100	IP-graad	IP40
Vermogen-verspreiding (W)	25	Stoot-bestendigheid	IK08
Nominale spanning	400 V	Deur kleur	Blind
Klemmenblokken	80 A - IP20 tweepolige gaten met schroeven	Aantal modules EN 50022	24 (12X2)
Nominale stroom	125 A	Gloeidraadproef	650 °C
Bedrijfstemperatuur	-25 +60 °C	Type materiaal	Halogeenvrij conform EN 60754-2
Electrocod	0321	Thermospanning met kogel	70 °C
Accessoires voor isolatieherstelling	Schroefdoppen (GW44623) of bevestigingsbeugels uit hars (GW44621)	Standaard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49
Isolatie-spanning	750 V	Pool 1 (mm²)	N/E (3x16) + (11x10)
Pool 2 (mm²)	N/E (3x16) + (11x10)		

DIMENSIONAL

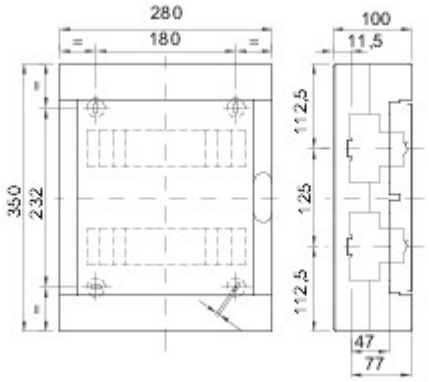

TECHNICAL SYMBOLOGY

II (conform de norm IEC 61140)

IP

IP40

IK

IK08

GWT

650 °C

-25 +60 °C

Halogeenvrij conform EN 60754-2

70 °C

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 23/04/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice