Product Data Sheet

GW40605

40 CDi-serie

The range of IP40 protected flush mounting enclosures offers sizes from 2 to 72 modules, available with a smoked transparent door (particularly suitable for the commercial and industrial sector) or a blank door (ideal for domotic application). They can be equipped with bipolar and unipolar terminal blocks, 80 A and 125 A, with screw wiring; they allow to create simple and neat wiring reducing the set-up time of the enclosure.

Isolatie-klasse	II (conform de norm IEC 61140)	Kleur	Wit RAL 9016
Buitenafm. LxHxD (mm)	330x270x85	IP-graad	IP40
Installatie	Voor bakstenen muur	Vermogen-verspreiding (W)	36
Stoot-bestendigheid	IK08	Nominale spanning	400 V
Deur kleur	Transparant fumé	Aantal modules EN 50022	12
Nominale stroom	125 A	Gloeidraadproef	650 °C
Bedrijfstemperatuur	-15 ÷ +60°C	Type materiaal	Halogeenvrij conform EN 60754-2
Electrocod	0311	Thermospanning met kogel	70 °C
Standaard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	Isolatie-spanning	750 V
Max. installeerbare klemmenblokken	1 x 12 modules		

DIMENSIONAL

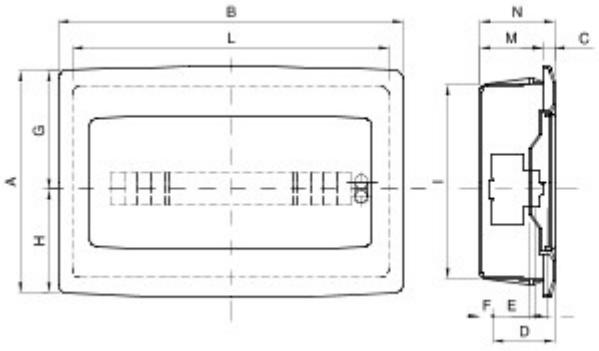

		A	B	C	N	D	E	F	G	H	I	L	M
8M	GW 40 604 GW 40 884	193	240	12	97	75	48	14	105	90	162	200	85
12M	GW 40 605 GW 40 885	270	330	16	101	75	48	17	148	122	230	290	85
18M	GW 40 608 GW 40 888	310	465	16	101	75	48	17	185	145	260	427	85

TECHNICAL SYMBOLOGY

EN 61140
II (conform de norm IEC 61140)

IP
IP40

IK
IK08

GWT
650 °C

-15 ÷ +60°C

HF HALOGEN FREE
Halogeenvrij conform EN 60754-2

70 °C

STANDARDS/APPROVALS

GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 18/04/2024

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice