




The IP40 protected flush mounting enclosures are available in sizes from 8 to 72M and are equipped with screw multipolar terminal blocks, 80 A IP 20. They are available with a smoked transparent door (particularly suitable for the commercial and industrial sector) or a blank door (ideal for domestic application); the terminal blocks allow to create simple and neat wiring reducing the set-up time of the enclosure.

Classe isolamento	II (Norma IEC 61140)	Cor	Branco RAL 9016
Dim. externas BxHxP (mm)	330x270x85	Grau de protecção	IP40
Instalação	Para construção civil	Potência dissipável (W)	36
Resistên. golpes	IK08	Tensão nominal	400 V
Cor porta	Cega	Réguas de terminais	80 A - IP20 bipolar holes with screws
N. mód. EN 50022	12	Corrente nominal	125 A
Glow Wire Test	650 °C	Temperatura de instalação	-15 ÷ +60°C
Tipo de material	Libre halogéneos segundo EN 60754-2	Código Electrocod	0311
Termopressão com esfera	70 °C	Norma	EN 60670-1, IEC60670-24
Tensão de isolamento	750 V	Pólo 1 (mm²)	N/T (3x16) + (11x10)
Pólo 2 (mm²)	N/T (3x16) + (11x10)		





DIMENSIONAL

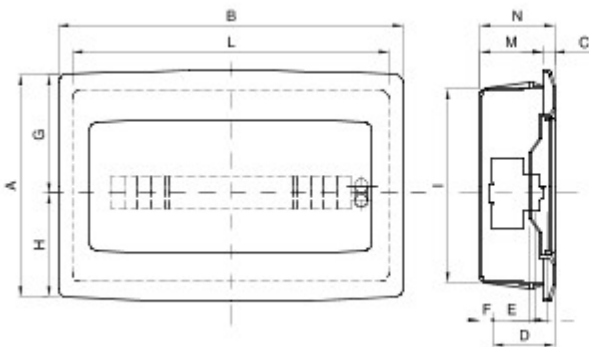

		A	B	C	N	D	E	F	G	H	I	L	M
8M	GW 40 604	193	240	12	97	75	48	14	105	90	162	200	85
	GW 40 884												
12M	GW 40 605	270	330	16	101	75	48	17	118	122	230	290	85
	GW 40 885												
18M	GW 40 608	310	465	16	101	75	48	17	165	145	260	427	85
	GW 40 888												

TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

