




A complete, versatile system of modular containers, perfectly integrable in the SYSTEM domestic range and able to meet the high protection installation requirements of the residential, commercial and industrial sectors. The 27 COMBI range is available both in the IP40 version and in watertight versions with IP55, IP65 and IP66 degree of protection, recommended for all outdoor applications which are subjected to extreme atmospheric conditions.

Cor	Cinza RAL 7035	Tipo de portinhola	Com membrana
Cor porta	Transparente	Grau de protecção	IP55
Classe isolamento	II	Resistên. golpes	IK07
N. módulos SYSTEM	2	Parafusos tampa	Aço inoxidável
Par de aperto Parafusos de aperto	0.8 Newton/metro	Dimensões BxA (mm)	75x85
Glow Wire Test	650 °C	Termopressão com esfera	70 °C
Norma de referência	EN 60669-1	Temperatura instalação	-25 +60 °C
Código Electrocod	0110		



### DIMENSIONAL

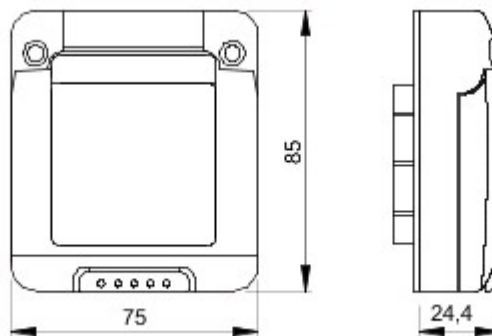

### TECHNICAL SYMBOLOGY

**IP**  
IP55

**II**

**IK**  
IK07

**GWT**  
650 °C

**70 °C**

### STANDARDS/APPROVALS

