


### ESALITE HB



Industrial LED lighting fixture made of die-cast EN AB 46100 aluminum with polyester powder coating. Correct illumination is provided by an optical system composed of different versions of lenses and sealed by an extra-clear tempered glass of 4mm. Silicone gaskets, Goretex breathing and anti-condensation device, 2 waterproof connectors for 1.5 mm<sup>2</sup> cables and stainless steel external screws. Integrated suspension fixing system thanks to a ring made directly in the die-cast aluminum. The die-cast aluminum structure guarantees optimal performance conditions both @ Ta25 ° and @ Ta50 ° thanks to specific thermal sizing tests. The correct heat dispersion inside ESALITE is guaranteed by the special passive heat sink with a very low copper content that offers high qualitative and quantitative performances.

#### GENERAL INFORMATION

Context	Logistics and industrial manufacturing lighting
Luminaire	LED Industrial Reflector
Aplicação	Interior/Exterior
Unique digital code (Datamatrix)	Datamatrix
Cor	Cinza RAL 9006
Tipo de fonte luminosa	LED - Não substituível
Potência de sistema	420 W
LED Lifetime	L90B10 (Tq 25°) 100000 h; L90B10 (Tq 50°) 55000 h

Peso (kg)	22.5
Garantia	5 anos
Temperatura de armazenagem	-25°C + +70°C / HR 10% + 85%
Operating temperature	-25°C + +50°C

#### MATERIALS

Body	Injeção de alumínio
Vidro	Flat tempered glass 4mm
Optic	PMMA lens
Gasket	CNC deposited sealant
Locking Hook	-
External screw	Stainless steel
Colour	Polyester powder coated

#### STANDARDS AND APPROVALS

Classificação	-
Aparelho com reduzida temperatura superficial	-
Certificação DIN 18032-3	Si
IPEA	-
Classe isolamento	I
Grau de protecção	IP66
Resistên. golpes	IK08
Glow Wire Test	-

#### OPTIC AND ILLUMINATING FEATURES

Óptica	Narrow 30°
Unified Glare Rating	UGR ≤ 25
Lúmen saída (lm)	43500
Efficiency (lm/W)	104
Temperatura de cor	5700 K
Color Rendering Index	CRI>80
Standard Deviation Colour Matching	SDCM = 3
Photobiological Risk Class	RG0


#### ELETRICAL AND LIGHTING FEATURES

Tensão de alimentação	220-240 V
Frequência nominal (Hz)	50/60 Hz
Driver	Included
Driver failure rate	F10 = 100.000h Tq25°C/50.000h Tq40°C
Overvoltage protection	DM 6KV / CM 8KV
Control System	DALI


#### INSTALLATION AND MAINTENANCE

Mouting and installation	Suspended
Tilt	Not possible
Wiring	With watertight connector
Fixação	-
Light souce replaceability	Not available
Controlgear replaceability	Not available
Driver Box	Integrado
Superfície máxima exposta ao vento	0

### DIMENSIONAL

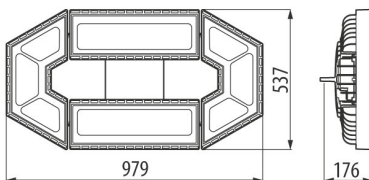

### PHOTOMETRIC DISTRIBUTION



### TECHNICAL SYMBOLOGY



IP  
IP66

IK  
IK08

GWT  
-

### STANDARDS/APPROVALS



Data, measures, designs and pictures are for information purpose only, last update 17/01/2022. They can be changed at any moment, therefore it is always recommended to read the last updated version published on the website [www.gewiss.com](http://www.gewiss.com). Lumen output and system power are subject to a tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Terms of warranty at <https://www.gewiss.com/it/en/company/landingpage/led-warranty>. - 1 of 2



ESALITE HB

