




IP65 range of watertight enclosures from 4 to 72M with smoked transparent door. The main technical features are: reversible front and back panel, removable frames and panels with windows and detachable doors with up to 180° opening and lock accessory. The enclosures can be equipped with bipolar and unipolar terminal blocks, 80 A and 125 A, with screw wiring; they allow to create simple and neat wiring reducing the set-up time of the enclosure.

Isolatie-klasse	II (conform de norm IEC 61140)		Kleur	Grijs RAL 7035
Buitenafm. LxHxD (mm)	298x570x140	IP-graad	IP65	
Vermogen-verspreiding (W)	42	Stootbestendigheid	IK09	
Nominale spanning	400 V	Deur kleur	Transparant fumé	
Aantal modules EN 50022	36 (12x3)	Nominale stroom	125 A	
Gloedraadproef	650 °C	Bedrijfstemperatuur	-25 +60 °C	
Type materiaal	Halogeenvrij conform EN 60754-2	Electrocod	0321	
Thermospanning met kogel	70 °C	Accessoires voor isolatieherstelling	Schroefdroppen (GW44623) of bevestigingsbeugels uit hars (GW44621)	
Standaard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49	Isolatie-spanning	1000 V conform EN 62208 zowel bij AC als DC	
Max. installeerbare klemmenblokken	3 x 12 modules			




### DIMENSIONAL

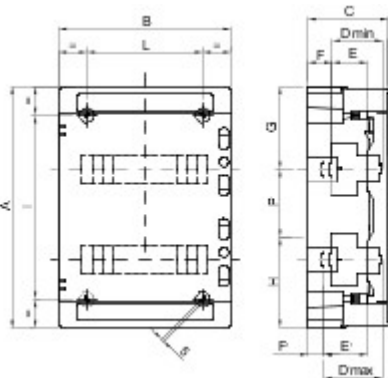

		A	B	C	Dmin	E	F	G	H	P	Dmax	E'	F'	NR	I	L
24M	<b>GW 40 104</b>	420	298	140	75	48	48	147,5	122,5	150	102	75	21	4	320	200
36M	<b>GW 40 105</b>	570	298	140	75	48	48	147,5	122,5	150	102	75	21	4	494	200
	<b>GW 40 107</b>	463	410	140	75	48	48	154	134	175	102	75	21	4	363	310
54M	<b>GW 40 108</b>	655	410	140	75	48	48	162,5	142,5	175	102	75	21	6	293	319
72M	<b>GW 40 109</b>	878	410	160	75	48	48	175	155	200 175	102	75	21	6	394	319

### TECHNICAL SYMBOLOGY



### STANDARDS/APPROVALS

