


Flush-mounting touch dimmer module. Two touch areas on the front for switching the connected load ON and OFF (short press) or for regulating the brightness (long press).  
The device must be completed with one of the ICE Touch plates available. Inside the package of the plates is a sheet of interchangeable icons to customize the control symbol.  
The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

Description	Dimmer touch	Power supply	100 ÷ 240 V ac - 50/60 Hz
No. modules	1	No. input channels	2
Local control	Via 2 frontal touch areas (must be completed with ICE Touch plate)	Auxiliary input channel voltage	100 ÷ 240 V ac - 50/60 Hz
Stocking temperature	-25 ÷ +70 °C	No. output channels	1
Working temperature	-5 ÷ +45 °C	Relative humidity (non-condensative)	Max 93%
240 V ac Incandescent-halogen lamps	4 ÷ 150 W	Front light signaling	Blue led
240 V ac LED lamps	4-150W (max 10 lamps)	Wiring terminals	With screw
Loads piloted from electronic transf. 240 V ac	4 ÷ 150 VA (240 V ac)	Terminal tightening capacity stranded cables (mm <sup>2</sup> )	Max. 1,5
240 V Fluorescent lamps	-	Terminal tightening capacity solid cables (mm <sup>2</sup> )	Max. 1,5
Load control	Trailing edge	Context	Dry indoor places
Acoustic signalling element	Buzzer	IP degree	IP20 (with plate fitted)
Standard	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000		

### DIMENSIONAL

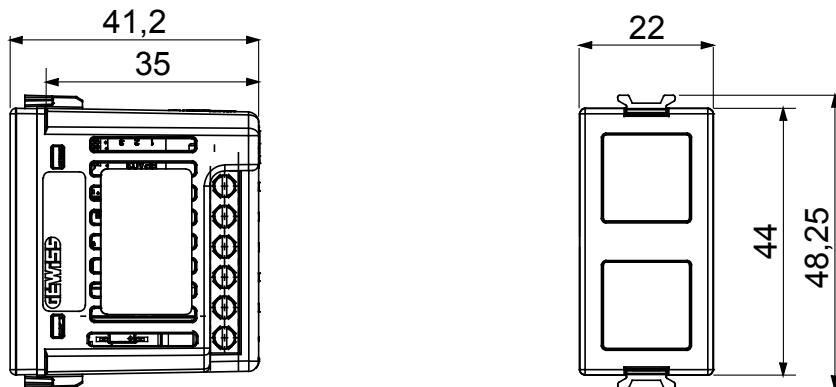

### TECHNICAL SYMBOLOGY

**IP**

IP20 (with plate fitted)

### STANDARDS/APPROVALS

