



Description Interruttore automatico scatolato  
 Code MSX 400  
 No. of poles 3P+N  
 Rated current 400 A  
 Release Electromechanic


#### ELECTRICAL CHARACTERISTICS

Standard	IEC/EN 60947-2	Execution	Fixed - Plug-in
Use category	A	DIN rail mounting	No
Rated frequency (Hz)	50 / 60	Can be equipped with motor operator	Yes
Rated operating voltage (Ue)	690 Vac - 250 Vdc	Compatible interlock	Lever - Cable
Rated impulse withstand voltage (Uimp)	8 kV	Terminals supplied	Front FC
Overvoltage category	IV	Assembly position	Any
Insulation voltage (Ui)	800 V	Upline/downline power supply	Yes
Thermal regulation	0,63 - 0,8 - 1 x In	Electrical life (415Vac)	4.500 cycles
Magnetic regulation	6 - 8 - 10 - 12 x In	Mechanical life	15.000 cycles
Neutral protection	Not protected	Operating temperature	-5°C +65°C
Total power loss	89.59999999999999 W	Stocking temperature	-20° +65°
Rated short-circuit current making capacity (Icm)	-	Weight (kg)	5.6
Rated short-time withstand current for 0,3s (Icw)	-	Width	185 mm
I <sub>dn</sub> regulation	-	Height	260 mm
DT regulation	-	Depth	103 mm

#### SERVICE BREAKING CAPACITY (ICU)

220/240Vac	50 kA	220/240Vac	50 kA
400/415Vac	36 kA	400/415Vac	36 kA
440Vac	30 kA	440Vac	30 kA
525Vac	22 kA	525Vac	22 kA
690Vac	15 kA	690Vac	15 kA
250Vdc	40 kA	250Vdc	40 kA

### DIMENSIONAL

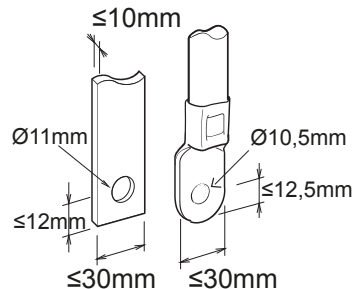



Product Data Sheet

GWD9362

MSX

STANDARDS/APPROVALS

