




Watertight plates IP55 System range for rectangular (3 and 4 modules) flush mounting boxes. Watertight plates self-supporting for the installation of System range devices. Ergonomic membrane, opening facilitated by a comfortable handle. IP55 degree guaranteed with closed lid and watertight plate mounted on smooth and waterproof walls, without grooves.

Categorie	Systeem-serie	Type	Italiaanse standaard platen
Groep	Waterdichte platen	Omschrijving	3 modules
Kleur plaat	Grijs RAL 7035	Afwerking	Glimmend
Materiaal	Technopolymeer	IP graad	IP55 (met gesloten deksel)
Deksel	Met membraan	Membraankleur	Transparant
Voor inbouw montage doos	Rechthoekig 3 posities	Bevestiging	Met schroef (2 stuks)
Type schroef	6/32 x 18mm	Schroefmateriaal	Gegalvaniseerd staal
Inbegrepen steun	Zelfondersteunend	Pakking	Geëxpandeerd ge vulkaniseerd rubber
Gloeidraadtest	650 °C	Thermodruk met kogel	70 °C
Standaard	EN 60669-1	Bedrijfstemperatuur	-25 +60 °C
UV-bestendigheid	Ja (ISO 4892-2)	Maximale openingshoek van de deksel	100°
Electrocod	0110		

DIMENSIONAL

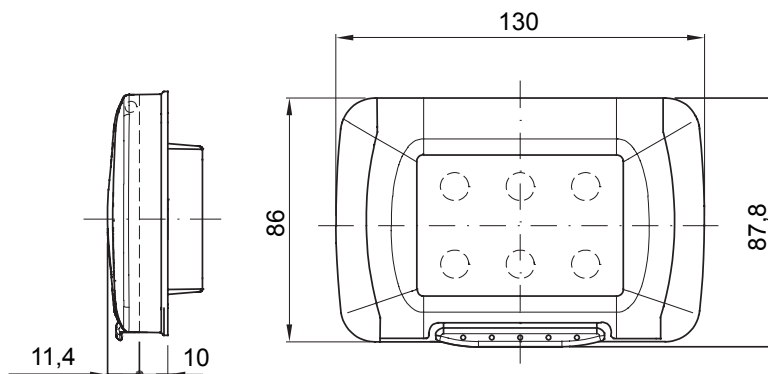

TECHNICAL SYMBOLOGY

IP

IP55 (met gesloten deksel)

GWT

650 °C



70 °C



-25 +60 °C

STANDARDS/APPROVALS

