




The IP40 protected flush mounting enclosures are available in sizes from 8 to 72M and are equipped with screw multipolar terminal blocks, 80 A IP 20. They are available with a smoked transparent door (particularly suitable for the commercial and industrial sector) or a blank door (ideal for domestic application); the terminal blocks allow to create simple and neat wiring reducing the set-up time of the enclosure.

Insulation class	II (according to IEC 61140 standards)	Colour	White RAL 9016
Outer dim. LxHxD (mm)	465x505x85	IP degree	IP40
Installation	For brick wall	Dispersible power (W)	52
Mechanical resistance	IK08	Rated voltage	400 V
Door colour	Smoked Transparent	Terminal blocks	80 A - IP20 bipolar holes with screws
No. of modules EN 50022	36 (18x2)	Rated current	125 A
Glow Wire Test	650 °C	Operating temperature	-15 ÷ +60°C
Type of material	Halogen-free in compliance with EN 60754-2	Electrocod	0311
Thermo-pressure with ball	70 °C	Standard	EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49
Insulation voltage	750 V	Pole 1 (mm²)	N/E 2x[(3x16) + (17x10)]
Pole 2 (mm²)	N/E 2x[(3x16) + (17x10)]		

DIMENSIONAL

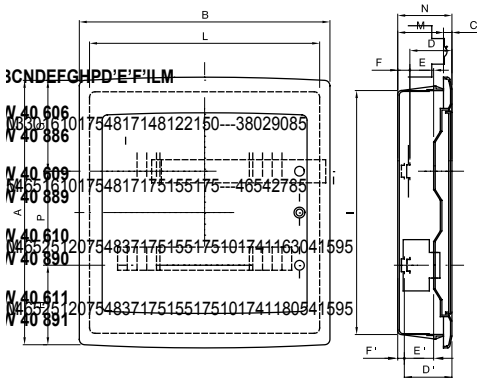

TECHNICAL SYMBOLOGY

 EN 61140 II (according to IEC 61140 standards)	IP IP40	IK IK08	GWT 650 °C	HF HALOGEN FREE Halogen-free in compliance with EN 60754-2	 70 °C
--	-------------------	-------------------	----------------------	---	--

STANDARDS/APPROVALS

