




I-FAST products are JOINON's DC fast-charging solutions ideal for charging all types of electric vehicles equipped with high-voltage systems in private or public high-rotation parking lots, highways and service areas. The offer consists of wallboxes up to 30 kW and stations up to 180 kW. They feature an elegant design and finishes that make them an urban and extra-urban furnishing product, with a graphic display for a better User Experience and use of services for the EV Driver user.

Power specification - AC input		Environmental	
Input voltage	3Φ 380 ± 415 Vac	Operating temperature	-30°C ± +50°C
AC input connection	3P+N+PE (Wye configuration), TN/TT	Humidity	5% ± 95% RH, Non-Condensing
Max input current	3Φ 40A	Altitude	≤ 2.000 m
Frequency	50 Hz / 60 Hz	IP degree	IP55
Power factor	> 0.99	Mechanical resistance	IK10 (not including screen & RFID module)
Efficiency	>94%	Cooling method	Fan cooling
Power specification - DC output		Mechanical	
Output voltage range	CCS2: 150 ± 950 Vdc CHAdeMO: 150~500Vdc	Dimension	610 mm x 230 mm x 690 mm
Max output current	CCS2: 80A CHAdeMO: 60A	Weight	88 kg
Maximum output power	30 kW	Cable length	4 m
Voltage/Current accuracy	±2%	Protection	
User interface & control		Input protection	
Display	7" graphic	OVP, OPP, OTP, UVP, SPD	
Push buttons	Operation Buttons / Emergency Stop Button	Output protection	
User Authentication	RFID: support ISO 14443A/B, ISO 15693, FeliCa Lite-S (RCS966), OCPP 1.6 JSON, QR Code, App	SCP, OCP, OVP, LVP, OTP, IMD	
Meter		Regulation	
Integrated DC Meter		Safety	
Communication		Certificate	
External		IEC 61851-1, IEC 61851-23, IEC 61851-21-2	
Internal		Charging interface	
Ethernet, Wi-Fi and 4G		DIN 70121, ISO 15118-2	
CAN bus / RS485		Contactless Solution	
Payment terminal		-	
		No	

DIMENSIONAL

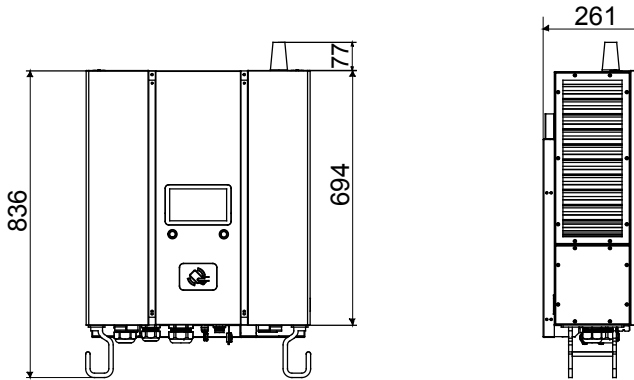

TECHNICAL SYMBOLOGY

IP **IK**

IP55

IK10 (not including screen & RFID module)

STANDARDS/APPROVALS

