


### SMART [PRO] 2.0




SMART [PRO] 2.0 is a high power outdoor and indoor LED projector, suitable for lighting large areas and sports facilities. It can be installed on the wall, ceiling or ground thanks to the polyester powder coated galvanised steel bracket with trivalent passivation, equipped with adjustable goniometric scale and supplied in a kit. The body is fabricated in aluminium die casting EN AB 46100, with integrated passive heat sink, powder coated polyester with trivalent passivation. Metal core PCB with CSP LED. Reflector made of metallic HT PC or anodised and polished aluminium. Hardened front glass with 4mm thickness, anti-ageing silicone seals and A2 stainless steel exterior screws. Plastic venting and anti-condensation device. Electrical connection via IP68 connector for 1.5mm<sup>2</sup> cables. Insulation class 1. Remote power supply unit supplied separately. Available with nine different types of optics, three types of Colour Temperature (3,000/4,000K/5,700K) and three different types of Chromatic Yield Index (CRI>70, CRI>80, CRI>90). Designed to withstand surges up to 5KV (RCCB mode) and 10KV (common mode), temperature variations from -30°C to +50°C, water and dust penetration up to IP66 degree of protection and impacts up to IK08 grade.

GENERAL INFORMATION		OPTIC AND ILLUMINATING FEATURES	
Context	Sport, Big Areas	Optik	S2 - Symmetric Medium
Luminaire	LED luminaire with mid and high lumen power	Unified Glare Rating	G*6 - ULOR = 0
panoları	İç / Dış	Lümen çıkışı (lm)	75800
Unique digital code (Datamatrix)	Currently not present	Efficacy (lm/W)	115
Renk	Grafit grisi	Renk Sıcaklık	5700 K
Işık kaynağı tipi	LED	Colour Rendering Index	CRI>80
Sistem gücü	660 W	Standard Deviation Colour Matching	SDCM = 3
LED Lifetime	L90B10(Tq25°C)=40.000h; L80B10(Tq25°C)=90.000h	Photobiological Risk Class	-
Ağırlık (kg)	15	Standart	EN60598-1; EN60598-2-5; IEC 62778; IEC 62471; EN13201
Garanti	5 yıl	ELETRICAL AND LIGHTING FEATURES	
Depolama sıcaklığı	-	besleme voltaj	-
Operating temperature	-30 +50 °C	Nominal frekans (Hz)	-
MATERIALS		Driver	To be ordered separately
Body	Alüminyum pres döküm	Driver failure rate	See external supply unit
Ekran tipi	Flat tempered glass 4mm	Overvoltage protection	See external supply unit
Optic	Polished anodised aluminum reflector with 99.99% pure aluminum	Control System	See external supply unit
Gasket	Anti-ageing silicone	INSTALLATION AND MAINTENANCE	
Locking Hook	Hexagonal metric screws	Mounting and installation	High-mast lighting - Wall mounting - Ground mouting
External screw	Stainless steel	Tilt	Rotation on bracket with integrated goniometer
Colour	Polyester powder coated	Wiring	Watertight connector
STANDARDS AND APPROVALS		için	Bracket
Sınıflandırma	-	Light souce replaceability	By professional
Yüzey sıcaklığı azaltılmış cihaz	Hayır	Controlgear replaceability	-
DIN 18032-3 belgesi	-	Driver Box	Dış
IPEA	-	Rüzgara maruz maksimum yüzey	0,222 m <sup>2</sup>
Yalıtım sınıfı	I	-	-
IP derecesi	IP66	-	-
Direnç dayanıklı	IK08	-	-
Akkor Tel Deneyi:	-	-	-

### DIMENSIONAL

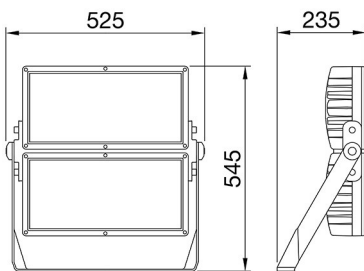

### PHOTOMETRIC DISTRIBUTION



SMART [PRO] 2.0

### TECHNICAL SYMBOLOGY



0,222 m2



**IP**  
IP66

**IK**  
IK08

**GWT**  
-

### STANDARDS/APPROVALS

**UK  
CA**



**CE**